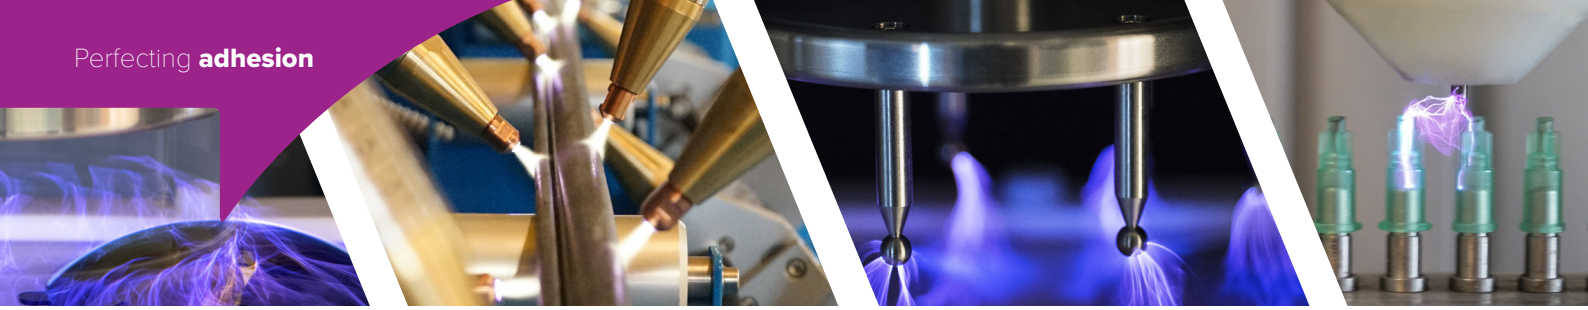

Tantec News • Cases

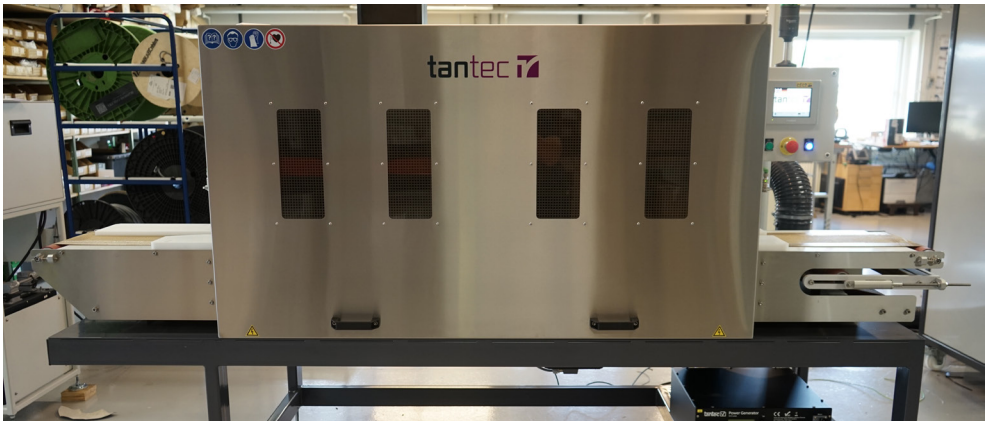

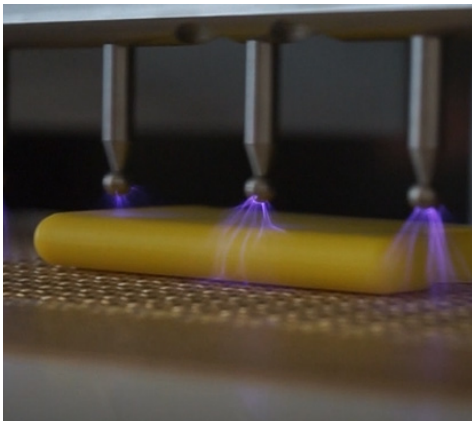

Customer:	European customer (37365)
Treatment of:	Spray container
Area to be treated:	Top and bottom surface
Purpose of treatment:	Improved adhesion of printing ink.
Capacity/Line speed:	5.5-6 mtr/min.
System type:	To be integrated into existing production line.

tantec
Plasma & Corona

www.tantec.com